



Vista in pianta
plan view

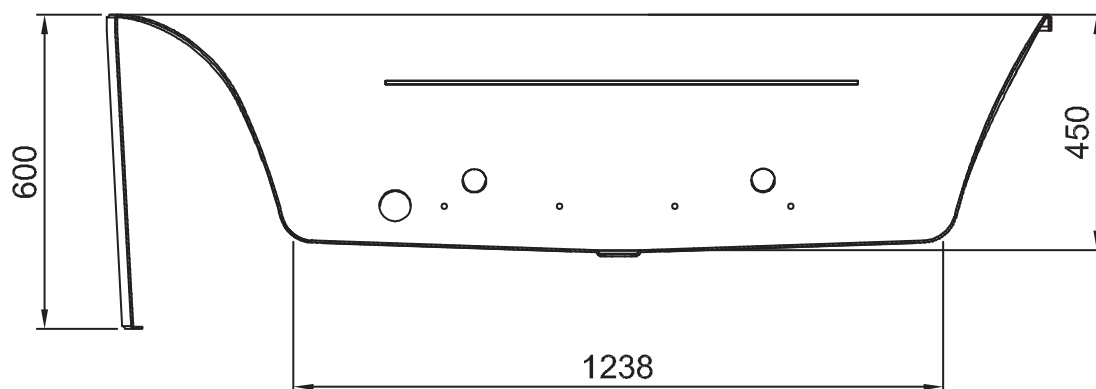

Sezione A/A'
Section A/A'

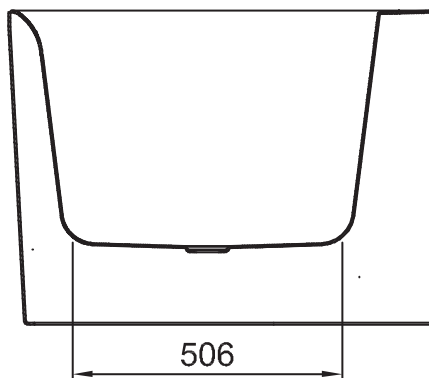

Sezione B/B'
Section B/B'

Colacril

I	CARATTERISTICHE IDRAULICHE	CARATTERISTICHE ELETTRICHE	REQUISITI DI PREINSTALLAZIONE
N.B. L'INSTALLAZIONE DEVE AVVENIRE A PAVIMENTO E PARETI FINITE	Numero jets: 4	V 220/240	C : Allaccio acqua calda rubinetteria parete: 1/2" F : Allaccio acqua fredda rubinetteria parete: 1/2" S : Allaccio scarico incassato a pavimento: 1-1/2" E : Allaccio elettrico idromassaggio IPX5
Peso netto: Kg 60		HZ 50/60	
Peso spedizione: Kg 90		KW 0.78	
Volume spedizione: m3 = 1,385 Contenuto acqua Lt 257		A 5	
GB	WATER SYSTEM SPECIFICATION	POWER SYSTEM SPECIFICATION	CONDITION REQUIRED BEFORE THE INSTALLATION
N.B. THE INSTALLATION MUST BE CARRIED OUT WITH FLOOR AND WALLS ALRESDY TILED	Numero jets: 4	V 220/240	C : Wall taps outlet for hot water: 1/2" F : Wall taps outlet for cold water: 1/2" S : Drainage outlet istalled in the floor: 1-1/2" E : Power outlet for the wirpool IPX5
Net weight: Kg 60		HZ 50/60	
total weight with package: Kg 90		KW 0.78	
Volume with package: m3 = 1,385 Water capacity Lt 257		A 5	
F	WATER SYSTEM SPECIFICATION	POWER SYSTEM SPECIFICATION	CONDITION REQUIRED BEFORE THE INSTALLATION
N.B. THE INSTALLATION MUST BE CARRIED OUT WITH FLOOR AND WALLS ALRESDY TILED	Numero jets: 4	V 220/240	C : Wall taps outlet for hot water: 1/2" F : Wall taps outlet for cold water: 1/2" S : Drainage outlet istalled in the floor: 1-1/2" E : Power outlet for the wirpool IPX5
Net weight: Kg 60		HZ 50/60	
total weight with package: Kg 90		KW 0.78	
Volume with package: m3 = 1,385 Water capacity Lt 257		A 5	